

# Sudden Bond Professional Ceiling Texture

## PRODUCT

Sudden Bond Professional Ceiling Texture is an aggregated decorative interior texture designed to be spray applied over finished and properly prepared gypsum panels. This spray is for interior use only and is not recommended for vertical walls.

## PACKAGING

SB Ceiling Texture is packaged in 40# bags with 56 bags on a pallet.

## MIXING INSTRUCTIONS

Use approximately 12 to 14 quarts of clean water for each 40 pounds. Use an electric drill or other mechanical blender. Spray usually goes into solution lump free within 15 minutes.

Excessive water usage causes check-cracking and poor bond. Do not intermix with any other products in wet or dry form.

## COVERAGE

A single 40# bag will cover approximately 300 square feet. Coverage will vary depending on thickness applied.


## SURFACE PREPARATION

For gypsum panels prepare joints, nails, angles and corners according to industry standards. Priming is recommended to prevent joint flashing.

For concrete grind off ridges. Level and fill all voids, offsets or other irregularities. Remove any oils or other release agents that may cause discoloration or affect bonding. Insure surface is completely dry, excess moisture can cause delayed leeching or discoloration of the textured surface. New concrete should be allowed to cure for sixty days prior to covering.

For previously painted ceilings insure the surface is free of dirt and other contaminants. Prime any discolored areas with a stain blocking primer.

Maintain minimum air, water, mix and surface temperatures of 55°F (13°C) within working area.

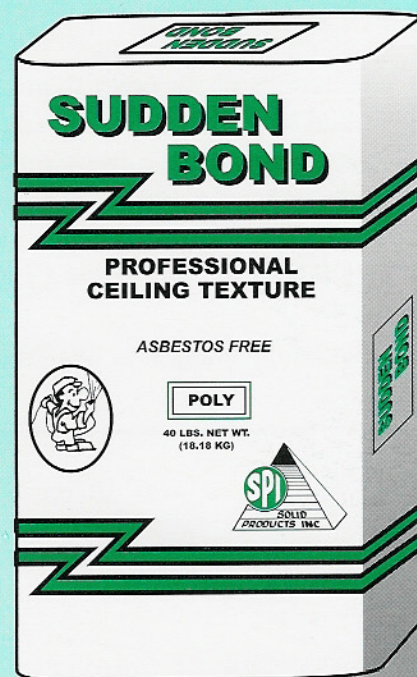



## APPLICATION INSTRUCTIONS

SB Ceiling Texture is designed to be spray applied. Most standard texture equipment can be used, including material pumps, bottom feed pressure pots or moyno pump systems. A one inch material hose and 1/2" or 3/8" round orifice are suggested. For smaller jobs a hand held hopper type gun may be used. Do not attempt to brush or roller apply.

## PRECAUTIONS

For interior use only. Wear safety glasses and a OSH/OSHA approved dust mask during mixing and application. Keep out of reach of children.

## LIMITED WARRANTY

Solid Products will not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from the date it was or reasonably should have been discovered.

## TECHNICAL INFORMATION

Technical support is available by calling (800) 344-8861



(800) 344-8861